MP-B

Signal Tower Option



Ф30

85_{db at 1m}

Electronic , Sound



Specifications

Model	Rated Voltage	Sound Level	Power Consumption
O MP-B	AC/DC 24V	80dB (at 1m)	0.7W


Requires Red LED Module

FEATURES

- · Double-insulation for enhanced durability and safety
- · Direct mount installation with just a single screw
- Main body made of heat resistant ABS resin for superior impact resistance
- Compatible with the MP and MPS Signal Tower (The Red module is required when using the optional MP-B)

Part Names and Dimensions

 Operates in conjunction with the Red LED module (Alarm activation with other colors must be special ordered).

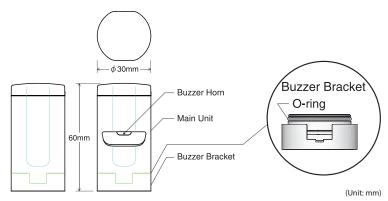

DEB





FEATURES

- · LED Color emits a Warm White color
- Suitable lighting for Patlite Compatible Rotating Lamp Series.
- Replacable with AC Lamp Bulbs for Patlite Products.

COMPATIBLE MODELS:


SKH-110A/120A, SKHB-100A/200A, SKH-100EA/200EA RH/RK(B)-100A/120AUL/200A/240AUL

WH/WK(B)(S)-100A/200A

KJS(B)-110/210/310/120/220/320

KJ(B)-110/210/310/410/120/220/320/420

KJT-110/210/310/120/220/320

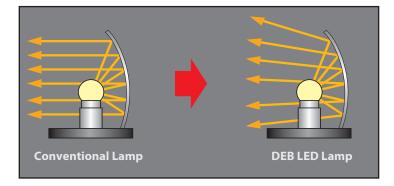

Specifications

Model	Rated Voltage	Power Consumption	LED Color	Lamp Base	Mass
DEB-15SBA-CL	AC 12V	1.7W (at AC13.5V)	Warm White	BA15S	9.8g